


LED VICTORYSCAN MK2 04054

DESCRIPTION

Powerful LED scanner based on the very latest 60WATT LED technology from CREE.

FEATURES



- The new (more powerful!) LED version of the extremely popular "WINNER II" and "ROVER" effects!
- Powerful LED scanner / barrel effect for Pro DJ, renting companies and discotheques
- Based on the very latest 60WATT LED technology from CREE:
 - Big light output and sharp gobos, thanks to excellent optics
 - Very low power consumption, only 105W (money saving!)
 - Extremely brilliant colors compared to units with halogen lamps
 - No lamp replacements and virtually no heat production
- 0-100% dimming and ultra fast strobe function
- 8 fixed gobos + open, equipped with gobo shaking feature
- Independent color wheel (8 colors + white)
- Excellent built-in programs for wonderful, ever changing, light shows:
 - DMX-control: 1, 7 or 8 channels (iSolution compatible)
 - Standalone: sound activated with internal mic
 - Master/slave: wonderful synchronized shows in standalone mode
 - SMART-DMX (previously known as DMX-MSL mode): thanks to this revolutionary new feature several units, working in master/slave, can still be controlled by 1 or 4 DMX-channels! (even while connected in a DMX chain, optional mini DMX splitter required)
- Optional remote controllers available: wired CA-8 or wireless RF8-SET
- Easy software updates via special software upgrade unit
- LED-display for easy menu navigation
- Beam angle = 17°
- Both LED SPINNER and LED VICTORYSCAN MK2 can be linked together in a Master/Slave configuration.

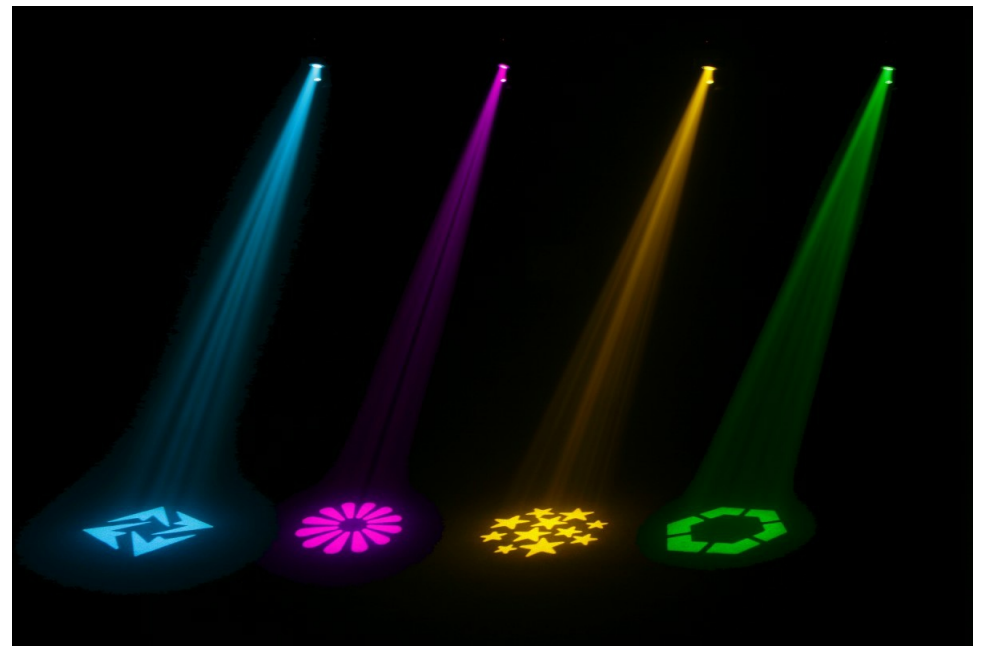



SPECIFICATIONS

General : Application	DJ & Club, Stage & Rental
General : Dimensions (cm)	47,2 x 26,4 x 20,8 cm
General : Weight (kg)	7.32
General : Powerinput	AC 100 - 240V, 50/60Hz
General : Energy Label	N/A
General : Power consumption W	105
General : Color	black
General : Display	LED
General : Fixation	optional standard clamp
General : IP rating	indoor
Control : manual	No
Control : Master/Slave	No
Control : SMART-DMX	No
Control : Standalone	sound
Control : optional remote	CA-8 or RF8-SET
Control : programmable	No
Control : upgradable software	Yes
Control : maximum DMX channels	8
Light : lamp socket	none
Light : lamp	LED
Light : colors	Red, Green, Blue, White, other
Light : mix colors	No
Light : fixed gobos	9
Light : focus	None
Light : zoom	None
Light : iris	No
Light : frost filter	No
Light : min. beam angle (°)	17
Light : max. beam angle (°)	17
Light : min. refresh rate (kHz)	No
Light : max. refresh rate (kHz)	No
Connections : input	3 pin XLR, jack, IEC
Connections : output	3 pin XLR
Brand	JB SYSTEMS
EANCode	5420025640480
Discontinued	No

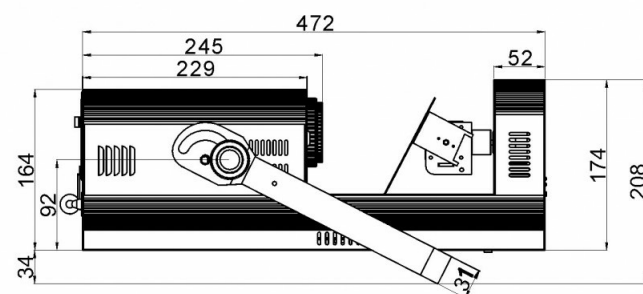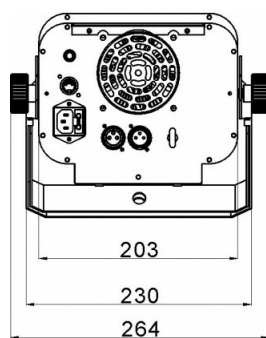

YOUR DEALER

