



www.xviveaudio.com

## V7 TUBEDRIVE

### Precautions

#### PLEASE READ CAREFULLY BEFORE PROCEEDING

##### Power supply

Please connect the designated AC adapter to an AC outlet of the correct voltage .

Please be sure to use only an AC adapter which supplies 9V(+10%)DC.center minus .The maximum working voltage not exceed 12V.otherwise may be dangerous equipment damage.fire or other problems. Unplug the AC power adapter when not using or during electrical storms.

##### Connections

Always turn off the power of this and all other equipment before connecting or disconnecting ,this will help prevent malfunction and / or damage to other devices.

Also make sure to disconnect all connection cables and the power cord before moving this unit.

##### Handling

Do not apply excessive force to the switches or controls.

Do not let paper,metallic,or other objects into this unit.

Take care not to drop the unit,and do not subject it to shock or excessive pressure.

##### Cleaning

Clean only with a soft,dry cloth. If necessary ,slightly moisten the cloth. Do not use abrasive cleanser,cleaning alcohol ,paint thinners,wax,solvents. Cleaning fluids,or chemical-impregnated wiping cloths.

##### Interference with other electrical devices

Radios and televisions placed nearby may experience reception interference. Operate this unit at a suitable distance from radios and televisions.

##### Location


To avoid deformation,discoloration,or other serious damage,do not expose this unit to the following conditions;

- .Direct sunlight
- .Magnetic fields
- .Excessive dusty or dirty location
- .Strong vibration or shocks
- .Heat sources
- .Extreme temperature or humidity
- .High humidity or moisture

### Main features

- .100% Analog wide range overdrive
- .vacuum tube like overdrive effect at low DRIVE settings, changing to a Screamer clipping-fuzz effect at high DRIVE settings
- .Wide range tone adjustment
- .Total (true) bypass
- .Ear out jacket

### Panel instruction

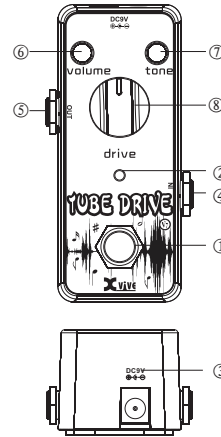

#### 1.TRUE BYPASS Footswitch:

Push down the footswitch To switch between effects And bypass status.

#### 2.On/OFF LED:

Instructs effects or bypass status of V7 ,when the LED is lit up,the effects is on.

#### 3. DC IN POWERJACK:

For power supply ,use a 9-volt DC regulated AC adapter(plug Polarity is positive on the barrel and negative in the center).

#### 4.INPUT Jack:

1/4"mono audio jack,for Connecting guitar.

#### 5.OUTPUT Jack:

1/4"mono audio jack,outputs the signal.

#### 6. Volume Knob:

Sets the overall output level

#### 7.TONE Knob:

Emphasizes a range of tones, from bass to treble as the tone Knob is clock wise

#### 8.DRIVE Knob:

Controls the amount of input gain.

### Specifications

Input:1/4"monaural jack (impedance:10M ohms)

Output : 1/4"monaural jack (impedance:150 ohms)

Power Requirements :AC adapter 9v DC(center minus plug)

Current Draw:40mA

Dimensions: 46 (W) \*94 (D) \*50 (H) mm

Accessories:Owner's Manual



www.xviveaudio.com

Disclaimer: Any specification's update won't be amended in this manual

尺寸：100\*150MM  
 材质：80g书纸  
 正反面印