

BTI-BEAMBAR18

DESCRIPTION

A versatile outdoor 1m long LED Pixel mapping bar, excellent for many rental jobs, TV-studios, concert stages, discotheques and many more...


FEATURES

- BTI-BEAMBAR18 is a very versatile 1m long outdoor **LED Pixel mapping bar**, excellent for many rental jobs, TV-studios, concert stages, discotheques and many more.
- Equipped with 18 extremely effective **6° narrow lenses**, in combination with powerful **25W RGBL LEDs**.
- **IP65 protection** for outdoor applications.
- The optional magnetic frost filter transforms the fixture into a nice wash light.
- **Full pixel control through an intuitive effect engine** or through DMX, Art-Net or sACN.
- 11, 20, 24, 76 or 96 DMX channels + RDM-functionality for easy remote setup.
- Smooth 16bit dimming with adjustable speed and 3 different curves.
- Build-in CCT presets from 1700K to 8000K.
- Led refresh rate selectable between 1200Hz and 25000Hz.
- Quick-lock system to easily mount the projectors horizontally or vertically together.
- OLED display with touch buttons for easy navigation.
- Seetronic IP65 5pin XLR connectors, can be converted to 3pin XLR with our BT-XLR5TO3 kit.
- Seetronic IP65 RJ45 connectors for Art-Net and sACN connectivity.
- Build in Art-Net to DMX conversion.
- Seetronic IP65 TRUE1 compatible power in/outputs.
- Software updates through standard RJ45 cable.
- Strong tilt brackets with (included) omega brackets for fast installation.



TECHNICAL SPECIFICATIONS

General : Dimensions (cm)	100 x 8.5 x 21
General : Weight (kg)	11
General : Powerinput	AC 100 - 240V, 50/60Hz
General : Energy Label	No
General : Power consumption W	450
General : Color	black
General : Display	OLED
General : Fixation	included omega bracket
General : IP rating	outdoor
Control : Modes	standalone fixed, standalone automatic, DMX
Control : Protocol	Art-Net, sACN, DMX, RDM
Control : programmable	No
Control : upgradable software	Yes
Control : minimum DMX channels	11
Control : maximum DMX channels	96
Light : lamp socket	No
Light : lamp	LED
Light : min. color temperature (K)	1700
Light : max. color temperature (K)	8000
Light : colors	Lime, RGBL
Light : mix colors	Yes
Light : functions	manual frost
Light : min. beam angle (°)	6
Light : max. refresh rate (kHz)	25
Connections : input	5 pin XLR, rdm, PowerCon® TRUE1 or compatible
Connections : output	5 pin XLR, rdm, PowerCon® TRUE1 or compatible
Brand	BRITEQ
EANCode	5420025655767
SKU	B05576

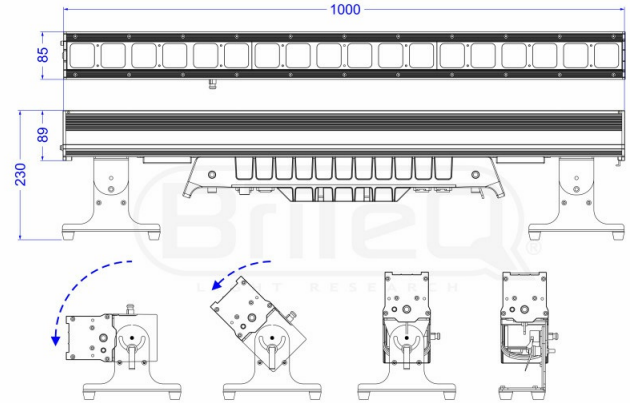

YOUR DEALER

