

Blackmagic Cloud Dock 2



Blackmagic Cloud Dock 2 lets you share up to 2 independent 2.5 inch disks over a high speed 10G Ethernet network. Just plug in SATA HDDs and SSDs, or extreme performance U.2 disks for incredibly fast file reading and writing. You can also sync files globally using Blackmagic Cloud, plus view all storage, connection and sync activity in real time on a display connected to the HDMI monitor port. Blackmagic Cloud Dock 2 has 2 10G Ethernet ports and an Ethernet over USB-C port in a half width, single rack unit, making it highly portable network storage that's perfect for high end film and television use.

\$649

Connections

SSD Interface

2 x removable and hot-swappable 2.5 inch U.2 SSD or SATA. SSD maximum height 11mm.

10G Ethernet Ports

2 x 10G BASE-T

USB-C Port


1 x USB 3.0 (up to 5Gb/s). Supports Ethernet Over USB

HDMI Monitor Outputs

1

Computer Interface

USB-C or Ethernet for shared file access, configuration and software updates.

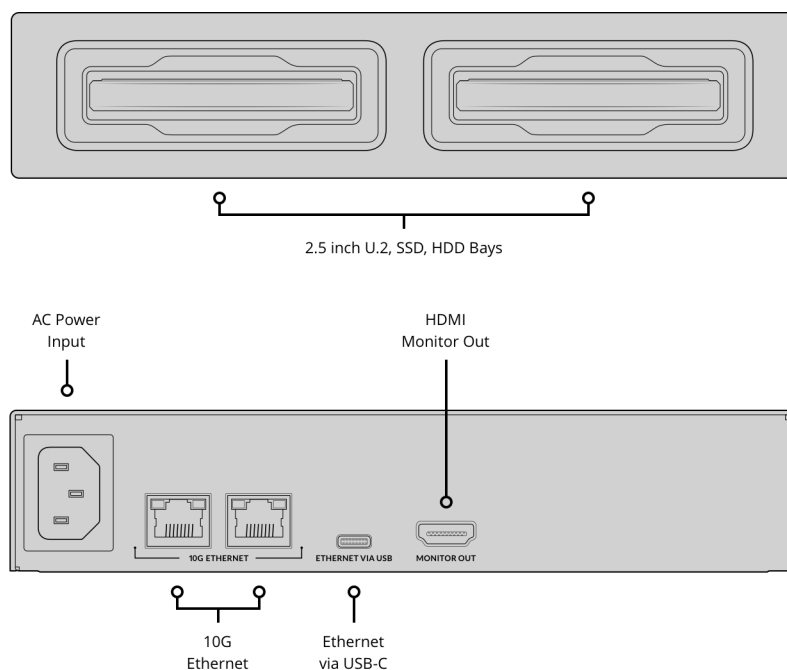

File Sharing Protocol

Protocol

NFS (HFS+ formatted disks only)
SMB

Computer Connections

50 max.

Cloud Synchronization



Blackmagic Cloud

[Learn More](#)



Amazon Web Services S3 sync.

Storage

Storage Type

Bring your own drive.

External Storage Format

ExFAT (Windows/Mac) or HFS+ (Mac)
file systems.

Displays

HDMI Monitor Out Standards

1080p50, 1080p59.94, 1080p60

Monitor Out Displays

Device Name, storage capacity and
use, Cloud Sync status, User Activity,
Hardware Status, storage map,
network data rate graph.

Status Indicator

LED bezel indicator lights around SSD
media slots.

Device Control

External Control

USB-C or Ethernet for configuration and software updates.

Software

Software Included

Blackmagic Cloud Setup Utility

Blackmagic Proxy Generator Lite

Internal software upgrade via Blackmagic Cloud Setup using USB-C port

Operating Systems



Mac 15.0 Sequoia,
Mac 26.0 Tahoe or later.



Windows 10, 64-bit.
Windows 11.

Power Requirements


Power Supply

Internal 100 - 240V AC 50/60Hz with IEC C14 mains input.

Power Usage

25W without SSDs.

Physical Specifications

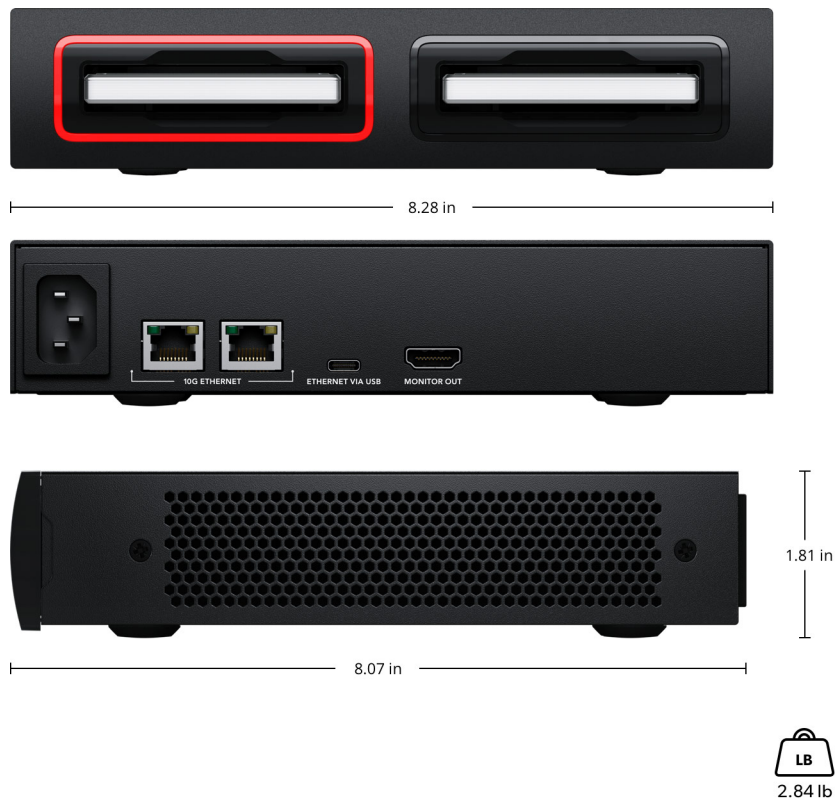

Environmental Specifications

Operating Temperature

0° to 40° C (32°to 104° F)

Storage Temperature

-20° to 60° C (-4° to 140° F)

Relative Humidity

0% to 90% non-condensing

What's Included

Blackmagic Cloud Dock 2

Welcome wallet with QR code for software download

Warranty

1 Year Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2026, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller