


H10 Headband

AIAIAI TMA-2 Product Manual

H10 overview

General

- **Power on/off:** Push middle button
- **Choose mode on the switch:** Blue for Bluetooth / White for W+ link
- **Enter pairing mode:** Push top and bottom button (3 sec)

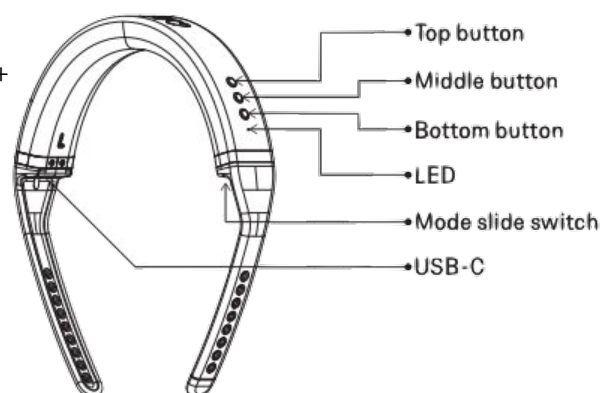

Playback controls

- **Play/pause:** Push middle button (single press)
- **Next track:** Push middle button (double press)
- **Previous track:** Push middle button (triple press)
- **Volume up:** Push top button
- **Volume down:** Push bottom button

Call/Assistant (Bluetooth mode only)

- **Answer incoming call:** Push middle button (single press)
- **End current call:** Push middle button (single press)
- **Reject incoming call:** Push and hold middle button (1.5 sec)
- **Activate assistant:** Push top and bottom button (1.5 sec)

LED FEEDBACK

State	LED	State	LED
Bluetooth mode	Response	W+ Link	Response
Power on	No additional feedback	Power on	No additional feedback
Power off	No additional feedback	Power off	No additional feedback
Connected	Static blue	Connected	Static white
Idle (not-connected)	Blinking blue (1s off, 1s on, loop)	Idle (not-connected)	Blinking white (1s off, 1s on, loop)
Idle (Battery level <10%)	Blinking red (1s off, 1s on, loop)	Idle (Battery level <10%)	Blinking red (1s off, 1s on, loop)
Charging (0-50%)	Blinking red (1s off, 1s on, loop)	Charging (0-50%)	Blinking red (1s off, 1s on, loop)
Charging(51-99%)	Blinking green (1s off, 1s on, loop)	Charging(51-99%)	Blinking green (1s off, 1s on, loop)
Charging (100%)	Static green	Charging (100%)	Static green
Mode switch working W+ Link-->BT	Blinking blue (1s off, 1s on, 2 cycles)	Mode switch working BT-->W+ Link	Blinking white (1s off, 1s on, 2 cycles)
Pairing mode	Blinking blue (300ms off, 300ms on, loop)	Pairing mode	Blinking white (300ms off, 300ms on, loop)
Reset paired device list	Blinking red (1s on, 1s off, 1s on)		